


DATA LINE®

Description	mm	Inch
<u>CONDUCTOR</u> #16 AWG, 19/0.0113" (0.29 mm) Bare Copper	1.37	0.054
<u>INSULATION</u> 0.0265" (0.67 mm) Wall EPC	2.72	0.107
<u>ARMOR</u> Special Galv. HS Steel Inner: 12/0.031" (0.79 mm) Outer: 18/0.031" (0.79 mm)	4.09 5.66	0.161 0.223

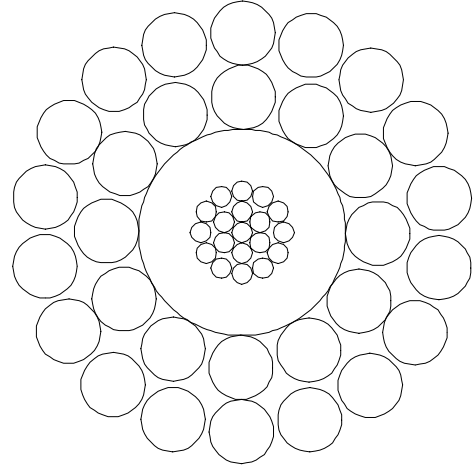

CABLE CHARACTERISTICS (Nominal Values @ 20°C)

	Metric	English
<u>PHYSICAL</u>		
Overall Dimensions	5.66 mm	0.223 in
Weight in Air	140 kg/km	94 lb/kft
Weight in Freshwater	119 kg/km	80 lb/kft
Temperature Rating, normal	135°C	275°F
intermittent	149°C	300°F
<u>MECHANICAL</u>		
Breaking Strength	27.1 kN	6,100 lbf
Bend Diameter	30 cm	12 in
Elongation (approximate)	0.58 m/km/kN	2.6 ft/kft/klbf
<u>ELECTRICAL</u>		
Voltage Rating	1,200 V	1,200 V
Insulation Resistance @ 500 Vdc	15,000 MΩ•km	50,000 MΩ•kft
dc Resistance		
cdr	14.8 Ω/km	4.5 Ω/kft
armor	14.8 Ω/km	4.5 Ω/kft
Capacitance (cdr - armor)	184 pF/m	56 pF/ft
Velocity of Propagation @ 1 MHz	67%	67%

PROPRIETARY; Use Pursuant to Company Instructions

tyco / Electronics / **The Rochester Corporation**

Rochester Stock Type 1-H-220A (with blocked inner armor)			
Date	Page	Revision	Part No.
06/11/2004	1	N	A219235