


DATA LINE®

Description	mm	Inch
CONDUCTORS (7) #20 AWG, 7/0.0126" (0.32 mm) Bare Copper	0.97	0.038
INSULATION - Dual Pass 0.0235" (0.60 mm) Wall ETFE/PMP	2.16	0.085
CORE 6 insulated cdrs around 1 with fillers as necessary. Voids filled with free-stripping semiconductive material. Semiconductive tape over core.	6.35	0.250
ARMOR: Galv. HS Steel		
Inner: 18/0.047" (1.19 mm)	8.74	0.344
Outer: 18/0.065" (1.65 mm)	12.04	0.474

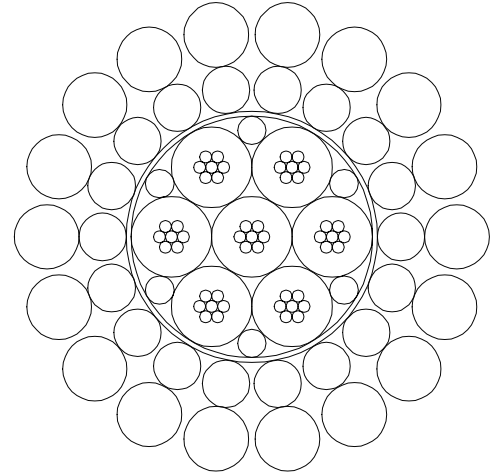

CABLE CHARACTERISTICS

(Nominal Values @ 20°C)

	Metric	English
PHYSICAL		
Overall Dimensions	12.04 mm	0.474 in
Weight in Air	572 kg/km	384 lb/kft
Weight in Freshwater	477 kg/km	320 lb/kft
Temperature Rating, normal	204°C	400°F
intermittent	216°C	420°F
MECHANICAL		
Breaking Strength	109 kN	24,500 lbf
Bend Diameter	66 cm	26 in
Elongation (approximate)	0.14 m/km/kN	0.6 ft/kft/klbf
ELECTRICAL		
Voltage Rating	1,200 Vdc	1,200 Vdc
Insulation Resistance @ 500 Vdc	15,000 MΩ•km	50,000 MΩ•kft
dc Resistance		
conductor	32.8 Ω/km	10.0 Ω/kft
armor	3.6 Ω/km	1.1 Ω/kft
Capacitance (cdr - armor)	164 pF/m	50 pF/ft
Velocity of Propagation @ 1 MHz	65%	65%

PROPRIETARY; Use Pursuant to Company Instructions

tyco / Electronics / **The Rochester Corporation**

Rochester Stock Type 7-H-472D
(ETFE/PMP INSULATION)

Date	Page	Revision	Part No.
11/03/2006	1	P	A276473