


DATA LINE[®]

Description	Inch	mm
<u>ELEMENT A; Coax (1)</u>		
Cdr: #22 AWG (0.38 mm ²) Cu	0.030	0.76
Ins: LDPE	0.177	4.50
Shield: #11 AWG Served Cu	0.208	5.28
Shielding Tape: Cu/Poly	0.213	5.41
<u>ELEMENT B; Power Singles (11)</u>		
Cdr: #18 AWG (0.81 mm ²) Cu	0.045	1.14
Ins: PP	0.069	1.75
<u>ASSEMBLY</u>		
Core: (1) Element A	0.213	5.41
Layer #1: (11) Element B's.	0.351	8.92
<u>STRENGTH MEMBER</u>		
Braided PU Coated Polyester	0.398	10.10
<u>JACKET</u>		
Hytrel [®]	0.548	13.92

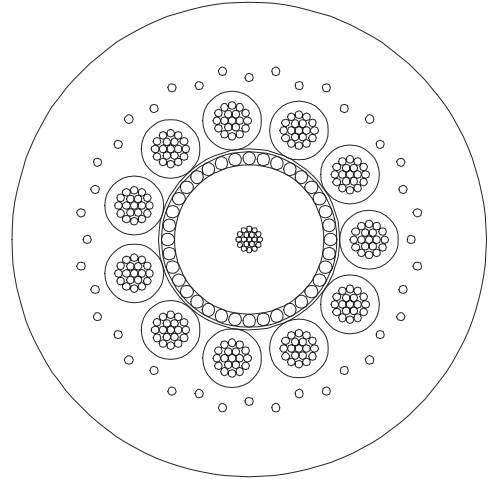

Hytrel[®] = Dupont Trademark

PROPRIETARY; Use Pursuant to Company Instructions

tyco / Electronics / **The Rochester Corporation**

Instrumentation and Control Cable			
Code: IE013035GOH00			
Date	Page	Revision	Part No.
01/30/2002	1	F	A301359

PERFORMANCE CHARACTERISTICS

Nominal Values @ 20°C

Metric

English

PHYSICAL

Weight in Air	270 kg/km	181 lb/kft
Weight in Sea Water	113 kg/km	76 lb/kft
Operating Temperature Range	-15°C to 80°C	5°F to 175° F

MECHANICAL

Breaking Strength (Fixed End)	8.9 kN	2,000 lbf
Working Load	0.9 kN	200 lbf
Recommended Bend Radius	25 cm	10 in

ELECTRICAL

Voltage Rating		
Element A	1,000 V	1,000 V
Element B	600 V	600 V
dc Resistance		
Element A		
Cdr	50.9 Ω/km	15.5 Ω/kft
Shield	4.9 Ω/km	1.5 Ω/kft
Element B	25.6 Ω/km	7.8 Ω/kft
Insulation Resistance		
Element A	30,000 MΩ•km	90,000 MΩ•kft
Element B	3,000 MΩ•km	10,000 MΩ•kft
Characteristic Impedance		
Element A @ 1 MHz	76 Ω	76 Ω
Capacitance		
Element A	69 pF/m	21 pF/ft
Attenuation		
Element A		
@ 0.5 MHZ	7.2 dB/km	2.2 dB/kft
@ 1.0 MHZ	10.8 dB/km	3.3 dB/kft

PROPRIETARY; Use Pursuant to Company Instructions

tyco / *Electronics* / **The Rochester Corporation**

Instrumentation and Control Cable
Code: IE013035GOH00

Date	Page	Revision	Part No.
01/30/2002	2	F	A301359