


DATA LINE[®]

Description	Inch	mm
<u>OPTIC WAVEGUIDE</u>		
Fiber: 8.3/125/250 μ m SMF	0.010	0.25
Buffer: Hytrel [®]	0.038	0.97
Belt:: Nylon	0.046	1.17
<u>CONDUCTOR</u>		
8/0.0285" (3.3 mm ²) HD Cu	0.103	2.62
<u>INSULATION</u>		
LD Polyethylene	0.329	8.36
<u>RETURN</u>		
60/0.0159 (7.7 mm ²) HD Cu	0.361	9.17
Tape: Cu Polyester	0.369	9.37
<u>BELT</u>		
HD Polyethylene	0.439	11.15
<u>ARMOR (3-Layers)</u>		
35/0.040" GEIPS	0.519	13.18
35/0.047" GEIPS	0.613	15.57
36/0.053" GEIPS	0.719	18.26

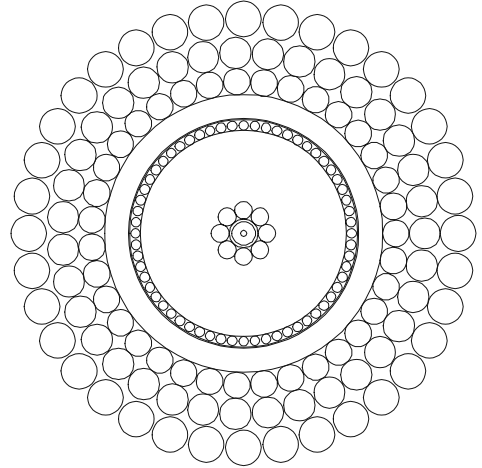

Hytrel[®] = Dupont Trademark

PROPRIETARY; Use Pursuant to Company Instructions

tyco / Electronics / **The Rochester Corporation**

Instrumentation and Control			
Code: IMØØ3Ø373POØØ			
Date	Page	Revision	Part No.
02/05/2002	1	D	A303717

PERFORMANCE CHARACTERISTICS

Nominal Values @ 20°C

Metric

English

PHYSICAL

Wt. in Air	1,215 kg/km	816 lb/kft
Wt. in Seawater	984 kg/km	661 lb/kft
Specific Gravity	5.5	5.5
Recommended Temperature Range	-20°C to 80°C	-4°F to 176°F

MECHANICAL

Breaking Strength	213 kN	48,000 lbf
Working Load (@ 0.40% Strain ref.)	53 kN	12,000 lbf
Recommended Bend Radius	36 cm	14"

ELECTRICAL

Voltage Rating	3,000 V	3,000 V
Insulation Resistance		
Insulation Resistance		
inner to outer cdr. @ 500 Vdc	24,000 MΩ•km	80,000 MΩ•kft
outer cdr. to armor @ 500 Vdc	1,200 MΩ•km	4,000 MΩ•kft
dc Resistance		
inner conductor	5.67 Ω/km	1.73 Ω/kft
outer conductor	2.56 Ω/km	0.78 Ω/kft
Attenuation		
@ 0.1 MHz	1.7 dB/km	0.5 dB/kft
@ 0.5 MHz	3.8 dB/km	1.2 dB/kft
@ 1.0 MHz	5.4 dB/km	1.6 dB/kft
@ 5.0 MHz	12.0 dB/km	3.7 dB/kft
@ 10.0 MHz	17.0 dB/km	5.2 dB/kft
Characteristic Impedance		
@ 1 MHz	50 Ω	50 Ω
Capacitance	105 pF/m	32 pF/ft

OPTICAL

Attenuation	
@ 1310 nm	0.45 dB/km
@ 1550 nm	0.30 dB/km

PROPRIETARY; Use Pursuant to Company Instructions

tyco / *Electronics* / **The Rochester Corporation**

Instrumentation and Control Code: IMØØ3Ø373POØØ			
Date	Page	Revision	Part No.
02/05/2002	2	D	A303717