


# DATA LINE®

Description	Inch	mm
<u>ELEMENT A; STEEL-LIGHT® (8)</u>		
Fbr: 62.5/125/245 µm MM	0.010	0.25
Buffer: Hytrel®	0.034	0.86
Armr: 10/0.015" Plow Steel	0.064	1.63
Belt: Polyethylene	0.094	2.39
<u>ELEMENT B; Power Single (8)</u>		
Cdr: #12 AWG (3.08 mm <sup>2</sup> ) Cu	0.086	2.18
Ins: Polyethylene	0.147	3.73
<u>ASSEMBLY</u>		
Core: Compliant Fill Rod	0.170	4.32
Layer #1: 8 Element A's. Void filled & bound with Adhesive/Poly tape.	0.359	9.10
Layer #2: 8 Element B's and 2 fill rods with 4 drain wires placed in interstices. Void filled and bound with Al/Poly tape.	0.666	16.92
<u>BELT</u>		
HDPE	0.781	19.84
<u>TAPE</u>		
Adhesive/Poly	0.787	19.84
<u>JACKET</u>		
HDPE with embedded GIPS wires.	1.100	27.94

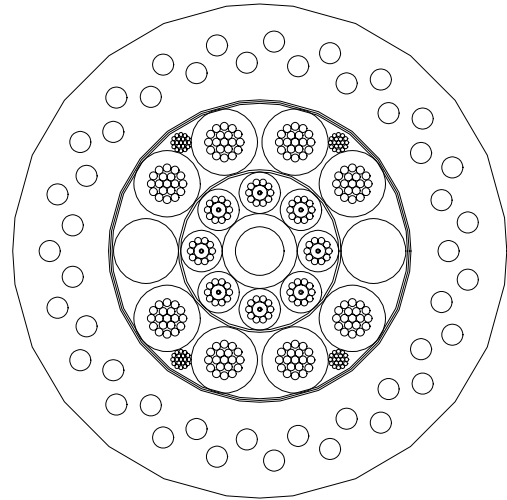

Hytrel® is a registered trademark of Du Pont

PROPRIETARY; Use Pursuant to Company Instructions

**tyco** / Electronics / **The Rochester Corporation**

Instrumentation and Control Cable Code: IM016066CPP00			
Date	Page	Revision	Part No.
10/29/2003	1	A	A305605

**PERFORMANCE CHARACTERISTICS**

Nominal Values @ 20 °C

**METRIC**

**ENGLISH**

PHYSICAL

Weight in Air	1,305 kg/km	877 lb/kft
Weight in Seawater	676 kg/km	454 lb/kft
Specific Gravity	2.1	2.1
Temperature Range	-20°C to 90°C	-5°F to 195°F

MECHANICAL

Breaking Strength	98 kN	22,000 lbf
Installation Load	21 kN	4,750 lbf
Recommended Bend Radius *	56 cm	22 in

ELECTRICAL

dc Resistance		
Element B	6.6 Ω/km	2.0 Ω/kft
Voltage Rating		
Element B	1,200 Volts	1,200 Volts
Insulation Resistance		
Element B	3,000 MΩ•km	10,000 MΩ•kft

OPTICAL

Attenuation Rate		
Element A		
@ 850 nm	3.8 dB/km	--
@ 1300 nm	1.6 dB/km	--
Bandwidth		
Element A		
@ 850 nm	160 MHz•km	--
@ 1300 nm	500 MHz•km	--

**PROPRIETARY; Use Pursuant to Company Instructions**

***tyco*** / *Electronics* / ***The Rochester Corporation***

Instrumentation and Control Cable			
Code: IM016066CPP00			
<b>Date</b>	<b>Page</b>	<b>Revision</b>	<b>Part No.</b>
10/29/2003	2	A	A305605